



# ART 70-71

## PN32 Brass 3 Way Ball Valve



### Features

- Screwed BSP Parallel (ISO 228/1)
- PTFE seats & seals
- Reduced bore
- 'L' & 'T' port

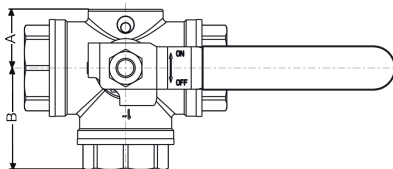

### Technical data


Max pressure: 1/4" - 1" 32 Bar  
 1 1/4" - 2" 25 Bar

Working temp: -20°C to +150°C

### Ball Positions


ART 70

ART 71

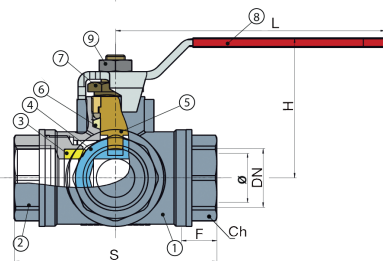

DN	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
S	74	74	80	90	105	115	138	161
H	58	58	60	64	73	79	100	105
B	37	37	39	46	52	58	69	80
A	22	22	24	28	31	35	42	48
F	12	12	14	16	19	21	23	26
Ch	22	22	29	34	42	50	57	68
L	90	90	125	125	140	140	220	220
Ø	10	10	12	15	20	25	32	40
Kv	3	3	4	6	12	21	35	47
Kgs	0.50	0.50	0.75	1.25	1.25	2.09	3.60	5.30

N.	Part Name	Materials
1	Body	Brass / Nickel Plated CW617N
2	Cap	Brass / Nickel Plated CW617N
3	Seat	PTFE
4	Ball	Brass / Chrome Plated CW617N
5	Stem	Brass CW614N
6	Stem Seat	PTFE
7	Packing Nut	Brass CW614N
8	Handle	Steel / PVC Coated
9	Nut	Steel / Zinc Plated

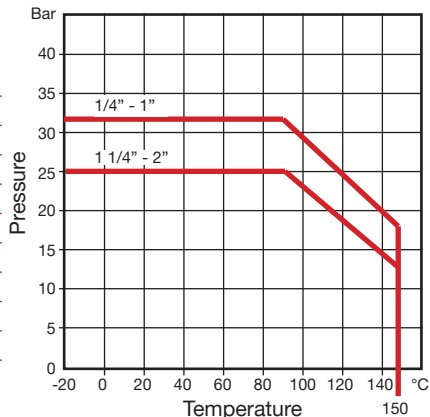

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.