

ART 68

PN20 Brass Y Strainer



Features



- Screwed BSP Parallel (ISO 228/1)
- Brass body
- Stainless steel mesh

Available on
bimstore.co

Technical data


Max pressure: 20 Bar

Working temp: 0°C to +150°C

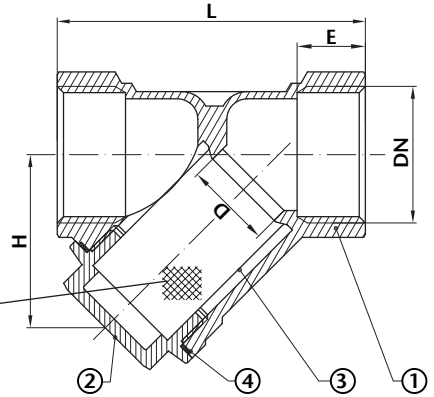

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
L	57	72	74.5	95	105	129	142.5	160	245
H	34.5	39.5	43	54	61.5	74.5	83	93	142
E	12.5	15	16.5	18	18	20	20	22	30
D	15	18.5	21	29	32	46	58	64	100
d1	0.60	0.84	0.84	0.84	0.84	0.84	0.84	0.84	0.84
W	0.9	1.3	1.3	1.3	1.3	1.3	1.3	1.3	1.3
Kv	5.7	7.9	16.0	23.0	36.0	50.0	72.0	95.0	154.0
Kgs	0.16	0.27	0.34	0.65	0.84	1.19	1.96	3.03	6.54

N.	Part Name	Materials
1	Body	Brass
2	Bonnet	Brass
3	Strainer	Stainless Steel 304
4	Gasket	PTFE

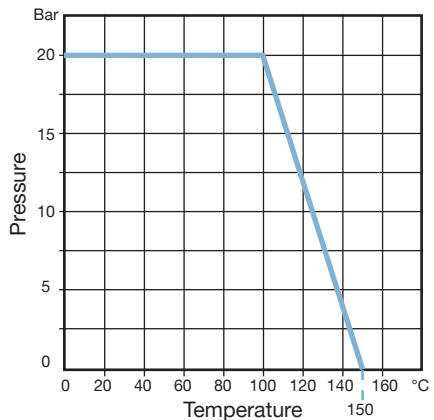

V1. Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.